ehome

An all-in-one monitoring, security and control system

THE **EHOME** SYSTEM IS EASY TO SET-UP AND USE. PLEASE FOLLOW THESE SIMPLE 12 STEPS TO QUICKLY GUIDE YOU FROM INSTALLATION TO REMOTE USAGE

STEP 1

Getting Started

You must first set up an account at http://www.tw-ehome.com/Registration.htm
Be certain to save your **User Name** and **Gateway Installation Token.**

STEP 2

Hardware Installation

Connect the Gateway and camera to your router or home network device as shown. The Gateway will go through a boot-up sequence.

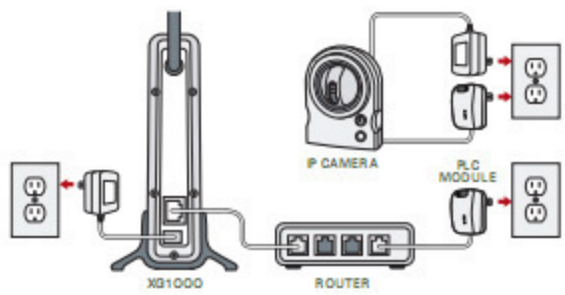

STEP 3

Software Installation

Insert installation software CD into the drive of your PC (not compatible on a MAC). The installer should start automatically. Follow the on-screen instructions to complete the software installation.

STEP 4

Launch

Under the PC Start menu, select **Start>Programs>Xanboo>ConfigUtility.** Select the Gateway and press **'LAUNCH'.**

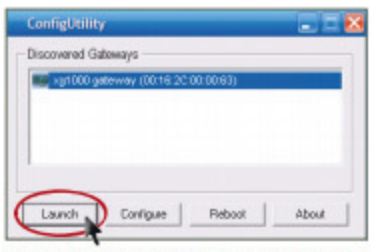

IT COULD TAKE UPTO 2MINUTES FOR GATEWAY TO APPEAR

STEP 5

Gateway User Name & Password

You must now select a **Gateway User Name** and **Password. Write these down in a safe place.** The Gateway User Name is used for accessing the Gateway set up pages. You can use the same User Name and Password that are mentioned in Step 1. After setting the ID and password, log in to the Gateway.

STEP 6

Register Gateway

Next, the Gateway will be registered with the remote account. Click on the link **'HOME MONITOR'** to start the Setup Wizard. Enter the UserID and Password for your remote account, and press **'REGISTER GATEWAY'.** You should get a confirmation of proper Gateway registration.

STEP 7

Discover Devices

The second step in the Startup Wizard is for device discovery. When the wizard starts the discovery process, press the **Discovery Button** on the Door/Window Sensor. Wait until the system indicates that the device is registered.

STEP 8

Discover Cameras

Press the link labeled **'CAMERA REGISTRATION PAGE'.** Press the **Reset Button** on the camera. Wait for the camera to be registered. The Setup Wizard is now complete. Click **'MONITOR DEVICES'** to get to the main page.

STEP 9

Login

Using the browser on your computer (Internet Explorer, Firefox, or Netscape), go to **https://ehome.xanboo.com**
Enter your **UserID** and **Password** in the proper fields and log in to your remote account.

STEP 10

Port Mapping

You need to set your router to allow communication between the Gateway and the remote service web site. **Port 2047** needs to be mapped for the Gateway IP address. You can find out the IP address of your Gateway by using the ConfigUtility software. Press the **'CONFIGURE'** button and write down the IP address.

The instructions for port mapping vary from router to router, but you can find information for your router at **http://www.portforward.com/routers.htm,** in your router manual, or call us +886-4-24813677

STEP 11

Congratulations!

Log into your account at
https://ehome.xanboo.com

You have registered and installed your XG1000 Gateway. With our Gateway you will **BE THERE, EVEN WHEN YOU'RE NOT!**

STEP 12

Turn Your Mobile Phone into a Window to Your Home!

With a java enabled cell phone, go to **http://ehome.xanboo.com/mobile/j2me** and download the java application by clicking 'EHOME MOBILE'

FOR ASSISTANCE, PLEASE CALL:
+886-4-24813677

FOR MORE INFORMATION PLEASE VISIT:
www.tw-ehome.com